

窓ガラス押ゴム (Hゴム)


DOOR GASKETS (H RUBBER)



DOS



DOS-16

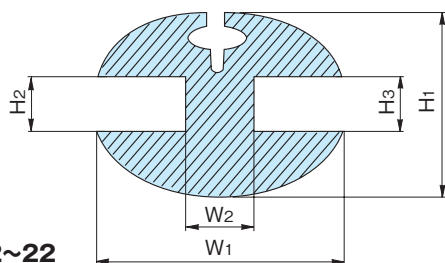

DOS-2~22

- 特 徴**
Feature
- 一般工業用です。
 - 配電盤、産業装置、点検口、各種工作機械などの窓枠の取り付けに使用されると便利です。
 - For industrial use.
 - It is useful to use with the window frame, such as distribution board, industrial equipment, inspection port, various kinds of machine tools.

材 質 ● DOS-2~22 / 軟質塩ビ (ニチブレン)

Material ● DOS-2~22 / Soft PVC

品 番 Product No.	W ₁	W ₂	H ₁	H ₂	H ₃	定尺 (m)	巻単価
DOS-2	20	6	15	3	1.5	30	¥22,000
DOS-3	25	7	18	3	1.5	20	¥23,000
DOS-10	25	7	20	5	2	20	¥25,000
DOS-11	26	7	18	5	2	20	¥22,000
DOS-12	20	6	18	6	2	30	¥22,000
DOS-13	25	8	18	6	2	20	¥21,000
DOS-14	30	7.5	18	6	2	20	¥25,000
DOS-16	21	4.6	16	5	2.3	20	¥17,000
DOS-17	20	5.5	16	3	3	30	¥27,000
DOS-19	25	7	18	6	3	20	¥25,000
DOS-21	26	7	20	7	3	20	¥21,000
DOS-22	28	8	21	6	3	20	¥27,000

粘着材付き自在ブッシュ

Flexible bush with adhesive



DB




- 特 徴**
Feature
- コの字型形状で内面粘着同時押出成形品。
 - 切り込み入りなので曲げて装着可能。
 - It is the extruded product which is the U-shaped inner surface adhesion.
 - It can be installed by bending because of the groove.

材 質 ● 本体 / 難燃オレフィン系エラストマー、酸素指数30、硬度A92
● 粘着部 / 強粘着エラストマー


備 考 ● 定尺30mです。
● 材質変更・形状変更を含め、特注にてお受けすることができます。

Material ● Body / Flame-retardant olefinic elastomer Oxygen index 30, Hardness A92
● Adhesive / Strong elastomer adhesive

Remarks ● The standard length is 30M.
● It can be supplied by bulid to order including changing the matreial or shape.



■ 使用例 Example of application



内面に粘着素材がついているので、板金開口部にそのまま取付可能。ゴミはできません。
It can be mounted directly to the panel opening because of the adhesive material which is attached to the inner surface. Waste doesn't occur.

品 番 Product No.	W ₁	W ₂	取付可能板厚	巻単価 (定尺) 30m
DB-1	4.2	2	1.6~2.3	¥7,200
DB-2	5.2	3	2.3~3.2	¥7,500