


スライドレール(ストップタイプ)

SLIDE RAILS

P-402



P-402-12

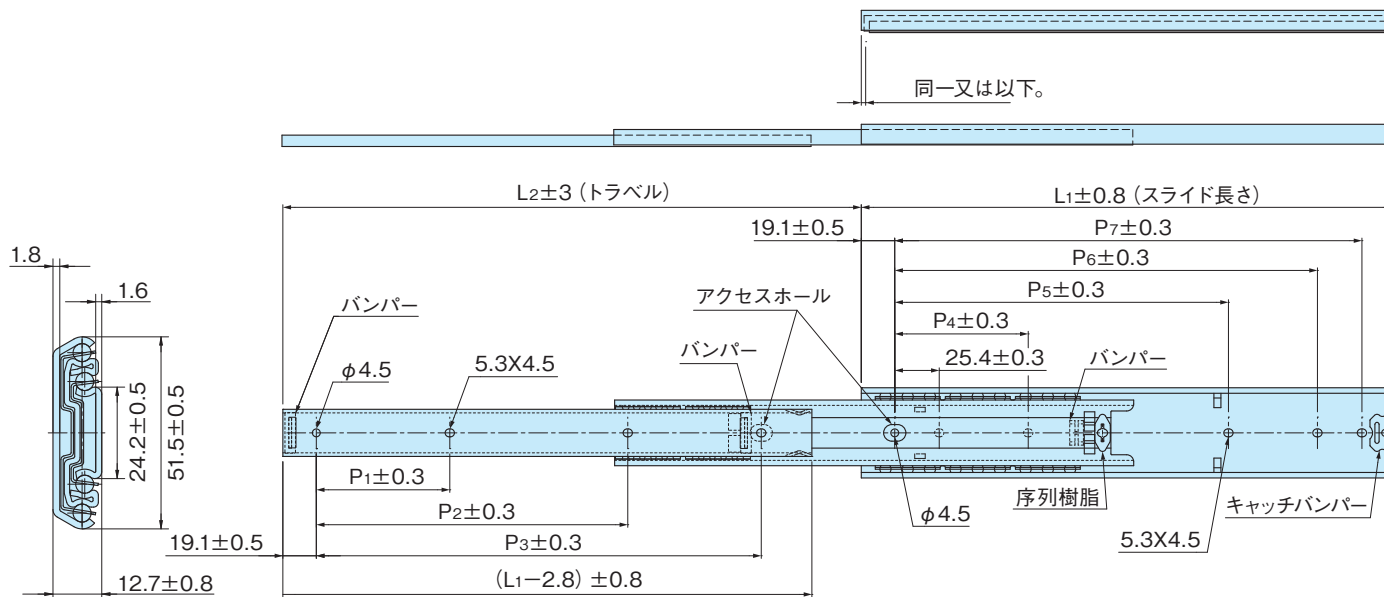

- 特 徴**
Feature
- ダブルスライドでフルトラベル仕様になっていますので、インナーレールは全長引き出せます。引抜くことはできません。
 - It is possible to pull out the entire length of the inner rail, because of double slide and full travel specification. But, it can not be pulled out.

- 材 質** ●鉄 (SPCC)
表面処理 ●電気亜鉛めっき 光沢クロメート
- 用 途** ●OA機器・医療機器・通信機・各種BOX
- 備 考** ●インナーレールとアウターレールは、必ずSET品ごとにお取り付けください。取り違えて取付けた場合、動作が重たくなる場合があります。
- シーケンシャルモーション機構付です。
 - 市販品につき、ケース単位(入数)でのご注文をお願い致します。

- Material** ●Cold rolled steel plate (SPCC)
Finish ●Electrolytic zinc-coating, Bright chromate
Specific Use ●OA equipment, medical equipment, communications equipment, and various cabinets.

- Remarks** ●Please install as set product of outer rail and inner rail. If the installation is wrong, there may be cases that the operation of the rail is heavy.
- Including sequential motion mechanism.
 - Please order in case unit (Quantity) about products on the market.

品番 Product No.	L ₁	L ₂	定格荷重(N/ペア)	P ₁	P ₂	P ₃	P ₄	P ₅	P ₆	P ₇	自重(kg/ペア) Weight	入数 Lot	単価 Price
P-402-12	304.8	330.0	617	76.2	177.8	254.0	76.2	190.5	241.3	266.3	1.34	18	¥1,800
P-402-14	355.6	382.0	627	101.6	203.2	304.8	88.9	215.9	292.1	317.5	1.56	18	¥2,050
P-402-16	406.4	432.0	646	127.0	228.6	355.6	127.0	241.3	342.9	368.3	1.79	18	¥2,350
P-402-18	457.2	482.0	666	127.0	279.4	406.4	127.0	292.1	393.7	419.1	2.01	18	¥2,600
P-402-20	508.0	533.0	686	152.4	304.8	457.2	152.4	317.5	444.5	469.9	2.24	18	¥2,900
P-402-22	558.8	584.0	705	177.8	330.2	508.0	177.8	342.9	495.3	520.7	2.46	18	¥3,200