


スライドレール(ストップタイプ)

SLIDE RAILS

P-301



P-301-12

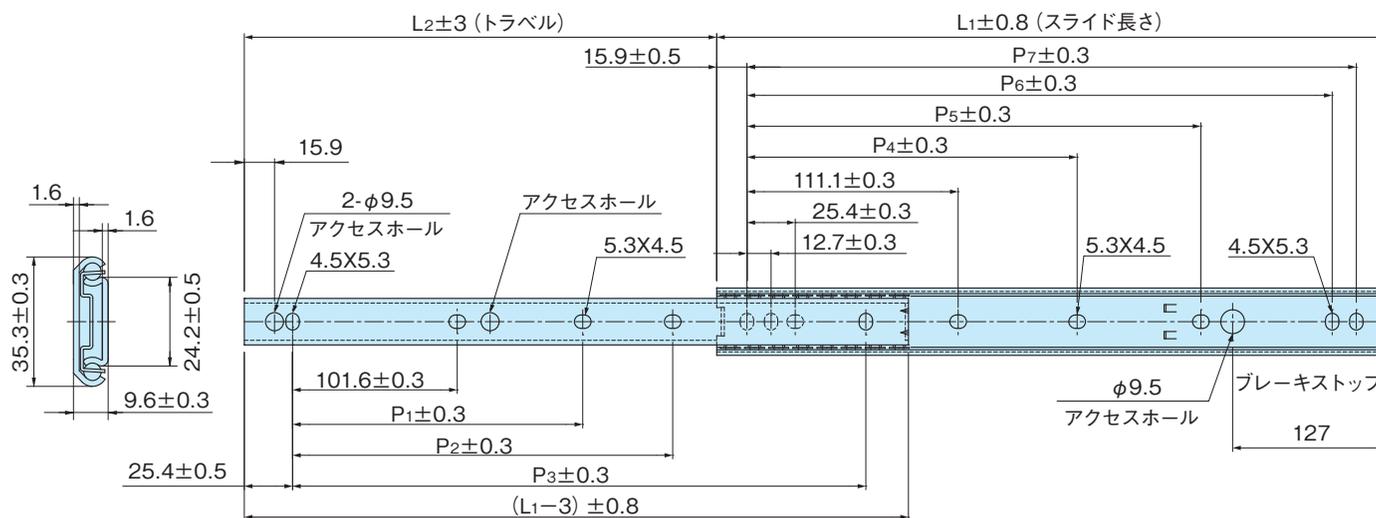

- 特徴**
Feature
- 金属リテーナによって、スムーズに作動します。
 - シングルスライドでインナーレールが全長の3/4引き出せる仕様となっています。
 - Smooth operation by a metal retainer.
 - The specifications to be able to the inner rail is pulled out 3/4 of the total length on a single slide.

- 材質** ●鉄 (SPCC)
表面処理 ●電気亜鉛めっき 光沢クロメート
用途 ●OA機器・医療機器・通信機・各種BOX
備考 ●インナーレールとアウターレールは、必ずSET品ごとにお取り付けください。取り違えて取付けた場合、作動が重くなる場合があります。
 ●市販品につき、ケース単位(入数)でのご注文をお願い致します。

- Material** ●Cold rolled steel plate (SPCC)
Finish ●Electrolytic zinc-coating, Bright chromate
Specific Use ●OA equipment, medical equipment, communications equipment, and various cabinets.
Remarks ●Please install as set product of outer rail and inner rail.
 If the installation is wrong, there may be cases that the operation of the rail is heavy.
 ●Please order in case unit (Quantity) about products on the market.

■使用例 Example of application



品番 Product No.	L ₁	L ₂	定格荷重 (N/ペア)	P ₁	P ₂	P ₃	P ₄	P ₅	P ₆	P ₇	自重 (kg/ペア) Weight	入数 Lot	単価 Price
P-301-12	304.8	226.5	314	—	152.4	254.0	—	149.2	260.4	273.1	0.60	40	¥1,090
P-301-14	355.6	227.5	284	—	203.2	304.8	—	200.0	311.2	323.9	0.70	40	¥1,190
P-301-16	406.4	303.0	353	—	254.0	355.6	—	250.8	362.0	374.7	0.82	40	¥1,250
P-301-18	457.2	328.0	422	203.2	304.8	406.4	212.7	301.6	412.8	425.5	0.92	40	¥1,350
P-301-20	508.0	379.0	392	228.6	355.6	457.2	238.1	352.4	463.6	476.3	1.02	40	¥1,450
P-301-22	558.8	404.5	441	254.0	406.4	508.0	263.5	403.2	514.4	527.1	1.16	40	¥1,500
P-301-24	609.6	430.0	441	279.4	457.2	558.8	288.9	454.0	565.2	577.9	1.24	20	¥1,650
P-301-26	660.4	480.5	412	304.8	508.0	609.6	314.3	504.8	616.0	628.7	1.36	20	¥1,650
P-301-28	711.2	506.0	412	330.2	558.8	660.4	339.7	555.6	666.8	679.5	1.46	20	¥1,750